



Custom solutions for

- | Food processing
- | Laboratories
- | Agriculture
- | Veterinary medicine
- | Pharmaceutical industry

Professional Cooling on the Move

The large accessory range for temperature controlled transport

| 2010 2011



We are always glad to help!



Contact

Internet:
www.dometic-waeco.com

Always a good link: the Dometic WAECO website. That's where you will find the complete Dometic and WAECO range. Plus interesting news about our company, information about the latest special offers, and online order forms for more special catalogues.



One-degree accuracy

Temperature controlled transport for genuine professionals

Taking highly perishable goods safely from one place to another – no problem with mobile refrigeration by Dometic WAECO. Our portable coolers have stood and passed the test of practice millions of times. To meet your demanding logistics needs they are fitted with special, high-performance electronics. Whatever it is you are transporting – lab samples, doses of semen or perishable food – WAECO and Dometic products provide one-degree accuracy for your freight!

Contents



6 – 9

Intro

Temperature controlled transport with Dometic WAECO technology
Special information on HACCP
Product overview

10 – 15

Mobile refrigeration

Coolers
| Thermoelectrics
| Extra modules for thermoelectric coolers

16 – 30

Mobile refrigeration

Kühlboxen
| Compressor technology
| Extra modules for compressor coolers

Customised built-in solutions

| Compressor technology

31 – 35

Mobile refrigeration

Custom solutions for catering and refrigerated transport

| Dometic refrigerator and warmer cabinet
| Dometic catering refrigerators
| WAECO compressor cooling container

36 – 37

Mobile refrigeration

Fully integrated cooling kits for refrigerated and deep-freeze vehicles

The right temperature – Key to your success

“Cool” is a relative term. Depending on the outside temperature and transported items, it may cover temperatures between -18°C and $+40^{\circ}\text{C}$. **Correct storage at a constant temperature is the key to success** for each temperature-sensitive product. You know the right temperature for your product. WAECO sets up the cooler to match. **The temperature is preset at our factory** and kept constant at a maximum deviation of $\pm 2^{\circ}\text{C}$ – or even less if required. Of course we can also preset **two different fixed values**, or leave the temperature adjustment in your hands. We can also install a **heater with three-point controller** for additional safety ...



Food samples: safe storage and accurate temperature management in the thermoelectric incubator box with factory preset fixed temperature



Dialysis products: best transported in a special thermoelectric box with factory preset fixed temperature (interior temperature limited at 37°C).




Doses of semen: safe transport without temperature deviations in a special thermoelectric box. Data logger for continuous temperature recording.

HACCP – Dometic WAECO fills the gaps in the cold chain

HACCP stands for Hazard Analysis Critical Control Points, an internationally binding quality management system for food products. The principle behind it is that all critical points in the delivery chain “from the stable to the table” are closely examined on the spot. For all critical points, limiting values are defined and then continuously checked and documented.

Critical risks are always involved when perishable food is exposed to high temperatures, e.g. while shopping or delivering to a customer. Investing in a refrigerated truck is not always financially viable. Why not save money and gain flexibility with mobile refrigeration by Dometic WAECO?

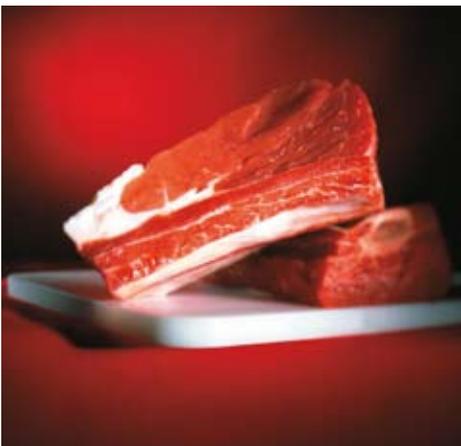

A profitable business

HACCP not only gives you satisfied customers, it boosts your profits. Success is in the system: implementing an HACCP concept means checking and revising all in-house processes. Even though potential health risks for consumers are the decisive criteria, the inspection will also reveal other shortcomings. The outcome: streamlined processes, minimised losses, optimum use of resources.

HACCP with mobile refrigeration by Dometic WAECO



1. **Hazard Analysis:** Analyse the hazards to consumers' health.
2. **Critical Control Points:** Trace the critical points in your cool chain.
3. **Define the critical limiting values:** What is the right temperature for your product(s)?
4. **Safety precaution:** Integrate coolers into your cool chain.
5. **Fine tuning:** Which cooler for which product? Do you need a special version?
6. **Documentation:** Not compulsory, but recommended – and no problem with Dometic WAECO!

Good reasons for HACCP

- | More quality: safe and healthy food
- | More profit: better process management

- | Satisfied customers
- | Prevention of legal risks and damage to your reputation

Mobile professionals for a continuous cold chain

On pages 31 – 35 we present to you five **transport solutions for professional kitchen use**, all designed by Dometic Luxembourg, specialist in professional cooling solutions for medical and catering applications. **The compressor-powered cooling container WAECO CoolFreeze 850VAN (pages 34 – 35) recommends itself as a low-cost alternative to a converted van.**

| Dometic refrigerator and warmer cabinet **Page 31**

| Dometic catering refrigerators **Pages 32 – 33**

| WAECO compressor cooling container **Pages 34 – 35**



Thermoelectrics

Precision from +1°C to +65°C

Thermoelectric custom coolers for temperature controlled transport are based on the tried and tested concept of WAECO TropiCool standard coolers (p. 10 – 13). Just add the modules of your choice (p. 14 – 15) to create your own customised solution quickly and cost-effectively.



WAECO TropiCool TC-35FL

- | Ideal for temperatures from +1°C to +15°C and +50°C to +65°C
Cooling capacity depends on the outside temperature
- | Accurate temperature control $\pm 2^\circ\text{C}$
- | Lightweight and easy to transport
- | In four sizes (7, 14, 21, 35 litres)
- | Flexible energy supply:
12/24/230 volts as standard (TC-07 12/230 volts)
- | Customised with extra modules (p. 14 – 15)

Compressor technology

Cool power from -18°C to $+10^\circ\text{C}$

Compressor-powered custom coolers for temperature controlled transport are based on the tried and tested concept of WAECO CoolFreeze standard coolers (p. 16 – 25). Just add the modules of your choice (p. 26 – 27) to create your own customised solution quickly and cost-effectively.



WAECO CoolFreeze CF-80

- | Powerful cooling from -18°C to $+10^\circ\text{C}$
- | Heating up to $+40^\circ\text{C}$ with extra heater
- | Accurate temperature control $\pm 2^\circ\text{C}$
- | Also for larger cooling capacities (10.5 to 106 litres)
- | Flexible energy supply: 12/24/100 – 240 volts as standard (models from CF-35 upwards)
- | Customised with extra modules (p. 26 – 27)

Extra modules



Factory preset fixed temperature with digital readout



Performance booster: interior fan



Temperature check at the wheel: data from the radio thermometer



Removable data logger with USB interface



Real-time documentation: temperature logger + mini-printer + software

Eutectics

High-tech made to measure

Eutectic coolers (p. 26) are ideal for temperature controlled transport of sensitive high-end products.

35 h cooling without power
CF-50, CF-60,
CF-80 and CF-110
+ eutectics



- | Factory preset fixed temperature
- | Pre-cooling on the 230-volt mains
- | Up to 35 hours cooling without energy supply at ambient temperatures up to +30°C
- | Optionally with GSM module for remote monitoring of inside and outside temperature
- | In four sizes: CF-50, CF-60, CF-80, CF-110 *

* Net capacity is reduced by about 1/3 due to the retrofitted eutectic module

Customised built-in solutions

Preset fixed point temperature

Ideal for ambulances and rescue vehicles: practical built-in appliances for safe transport of temperature sensitive products at the prescribed temperature (p. 28 – 29). With compressor cooling or integrated heater. Interior temperature limited at a level to suit the product stored.



WAECO CoolMatic MH-07

WAECO CoolMatic MR-07




WAECO CoolFreeze MC-045

- | | |
|------------------------------------------------------|-----------------------------------------|
| Built-in cabinets with compressor cooling or heating | Built-in cooler with compressor cooling |
| Fixed point temperature preset at +4°C or +40°C | Fixed point temperature preset at +5°C |
| Gross capacity approx. 7 litres | Gross capacity approx. 5 litres |
| Door and installation frame in stainless steel | Permanent (theft-proof) installation |

Extra modules



A text will do: GSM module for remote data retrieval

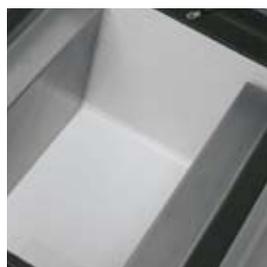

35 h cooling without power: compressor cooler + eutectic module



Safety all the way: Fixed point temperature preset at +4°C or +40°C



Ideal in confined spaces: detachable cooling unit with 1.5 m supply cable (MR-07)

WAECO TropiCool TC-35FL
35 litres capacity

12/24 volts DC
and
230 volts AC
as standard!



WAECO TropiCool TC-14FL
14 litres capacity

WAECO TropiCool TC-21FL
21 litres capacity

WAECO TropiCool TC-07
7 litres capacity

Thermoelectrics

12/24 volts DC and 230 volts AC as standard!

Lightweight, low-priced, versatile – these are the hallmarks of thermoelectric refrigeration. The **wear-free technology** is great for low-capacity heating or cooling of **small to medium-sized spaces**. It is based on the thermoelectric principle – which states that **heat or cold** is generated when the connection between different metals is linked to a direct current power source (Peltier

effect). The WAECO **TropiCool standard range** (p. 12 – 13) gives you a choice of four sizes ranging from a compact 7-litre cooler to a spacious 35-litre appliance. The three larger models (TC-14FL, TC-21FL and TC-35FL) are **fitted as standard with TC special electronics** and a **12/24/230-volt connection**.

To suit temperature controlled transport needs Dometic WAECO standard boxes can be fitted with customised extra modules. Read more on this on pages 14 – 15.



Aerospace technology for cooling and heating: the thermoelectric Peltier element works accurately, wear-free and without any refrigerant.

Well-engineered technology for enhanced user comfort

Perfect down to the last detail – product benefits of the TropiCool series



1 TC special electronics with soft-touch operating panel

WAECO TropiCool coolers* provide refrigeration up to 30°C below the ambient temperature and heating up to +65°C. Using the soft-touch operating panel, you can set the desired temperature in seven stages each: from +1°C to +15°C in the cooling mode, or from +50°C to +65°C in the heating mode. The memory function saves the last set parameters.

- › Cooling up to 30°C below ambient temperature
- › Heating up to +65°C
- › 7-stage temperature regulation for cooling and heating
- › LED temperature display
- › Memory function saves the last settings
- › Membrane keypad protects the electronics from dust and moisture

* All models except TC-07

Note:

For temperature controlled transport, TropiCool coolers can be fitted with a highly sensitive electronic system (p. 14 – 15) that allows temperature control in tight tolerances. The soft-touch operating panel is replaced by a digital display.




- 2 **Highly effective insulation**
Outstanding energy efficiency
- 3 **Dynamic interior ventilation**
Significantly improved cooling performance
- 4 **Wear-free fans**
Long service life
- 5 **Intelligent power-save circuit**
Electronics switch automatically to power-save mode once the desired interior temperature has been reached (for TC-14FL, TC-21FL and TC-35FL)
- 6 **12/24/230 volts as standard**
With priority circuit for 230 volts
- 7 **Heat exchanger and high-performance Peltier element**
Cooling performance up to 30°C below ambient temperature!
- 8 **Magnetic switch**
Switches the interior fan off when you open the cooler
- 9 **Universal fixing kit**
for TC-14FL, TC-21FL and TC-35FL (p. 12)



WAECO TropiCool TC-07

Thermoelectric cooler

4.01

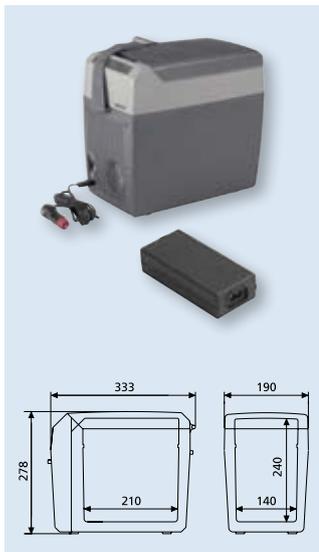


Gross capacity	approx. 7 litres
Voltage	12/230 volts DC/AC
Power consumption	approx. 36 watts
Temperature range	Cooling: approx. +5°C (up to 25°C below ambient temperature); Heating: approx. +65°C
Insulation	Polyurethane full-foam insulation
System	Wear-free thermoelectrics (Peltier system), cold/heat transmission to the interior through coated aluminium container, heat dissipation to the outside by brushless, wear-free fan
Colour	Dark grey/pale grey
Weight	approx. 2.8 kg
Quality features	Temperature regulation for cooling and heating with fixed point thermostats, ready for connection to 230 volts
Scope of delivery	Shoulder strap, 12-volt connection cable and 230-volt mains adapter included
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)
Product	Ref. No.
TropiCool TC-07	TC-07UG-12/230




WAECO TropiCool TC-14FL

Thermoelectric cooler with TC special electronics

4.01

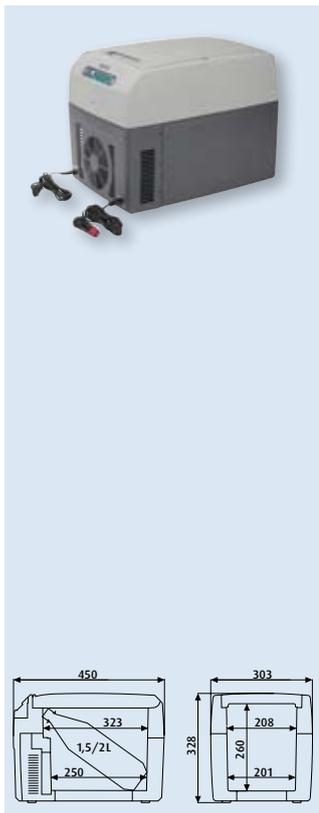

Gross capacity	approx. 14 litres
Voltage	12/24 volts DC and 230 volts AC
Power consumption	approx. 55 watts at 12 V DC approx. 60 watts at 24 V DC approx. 80 watts at 230 V AC
Average running time	30% at +20°C ambient temperature
Temperature range	Cooling: +1°C to +15°C (up to 30°C below ambient temperature); Heating: +50°C to +65°C
Insulation	Polyurethane full-foam insulation
System	Wear-free thermoelectrics (Peltier system), cold transmission to the interior by dynamically ventilated aluminium heat exchanger, heat dissipation to the outside by high-performance heat exchanger and brushless, wear-free fan
Material	Sturdy injection moulded parts
Colour	Dark grey/pale grey
Weight	approx. 5.0 kg
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)
Product	Ref. No.
TropiCool TC-14FL	TC-14FL-AC
Optional extra	
Universal fixing kit	UFK-T

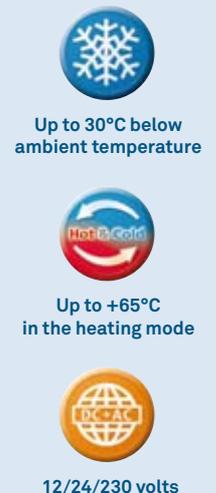

TC special electronics



Universal fixing kit

For TropiCool TC-14FL, TC-21FL, TC-35FL: fastening of TropiCool coolers in vehicles.

4.01




Material	Powder-coated metal
Colour	Black
Scope of delivery	Two base plates, two adjustable straps, set of screws
Product	Ref. No.
Universal fixing kit	UFK-T



WAECO TropiCool TC-21FL

Thermoelectric cooler with TC special electronics

4.01

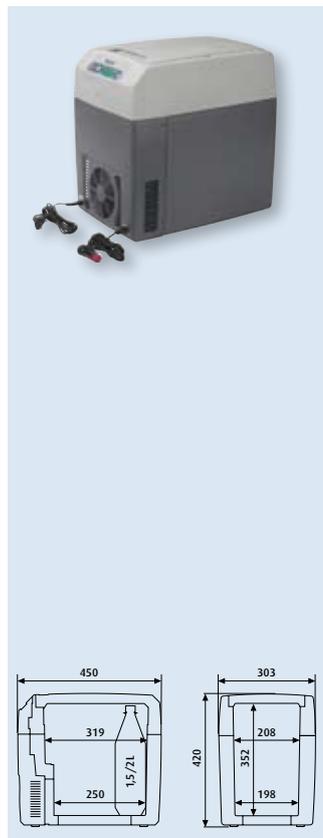

Gross capacity	approx. 21 litres
Voltage	12/24 volts DC and 230 volts AC
Power consumption	approx. 55 watts at 12 V DC approx. 60 watts at 24 V DC approx. 80 watts at 230 V AC
Average running time	32% at +20°C ambient temperature
Temperature range	Cooling: +1°C to +15°C (up to 30°C below ambient temperature); Heating: +50°C to +65°C
Insulation	Polyurethane full-foam insulation
System	As for TC-14FL
Material	Sturdy, injection-moulded parts
Colour	Dark grey/pale grey
Weight	approx. 6.0 kg
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with magnetic closure, sturdy, fold-away handle, vertical space for 2-litre bottles, adjustable grid divider
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
TropiCool TC-21FL	TC-21FL-AC
Optional extra Universal fixing kit	UFK-T

Up to 30°C below ambient temperature

Up to +65°C in the heating mode


12/24/230 volts

TC special electronics

WAECO TropiCool TC-35FL

Thermoelektrische Kühlbox mit TC-Spezialelektronik

4.01

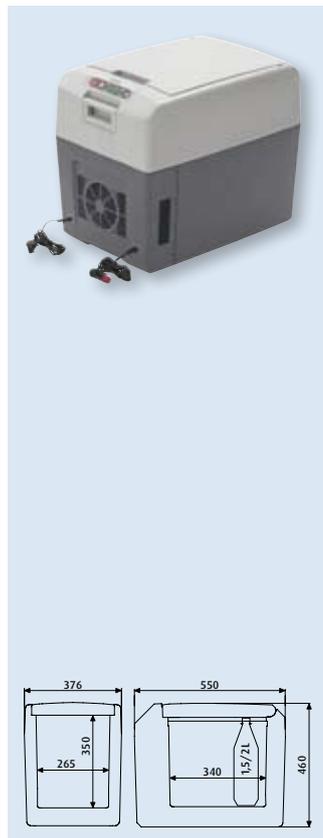

Gross capacity	approx. 35 litres
Voltage	12/24 volts DC and 230 volts AC
Power consumption	approx. 55 watts at 12 V DC approx. 60 watts at 24 V DC approx. 80 watts at 230 V AC
Average running time	35% at +20°C ambient temperature
Temperature range	Cooling: +1°C to +15°C (up to 30°C below ambient temperature); Heating: +50°C to +65°C
Insulation	Polyurethane full-foam insulation
System	As for TC-14FL
Material	Sturdy, injection moulded parts
Colour	Dark grey/pale grey
Weight	approx. 10.0 kg
Quality features	TC special electronics: 7-stage electronic thermostat with LED indicators, memory function, ON/OFF and cold/warm option activated with soft-touch operating panel, intelligent power-save circuit. Integrated mains supply unit with priority circuit, outstanding cooling performance, magnetic switch to deactivate the interior fan when the box is opened, detachable lid with snap lock closure, handy carrying grips, vertical space for 2-litre bottles, adjustable grid divider
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
TropiCool TC-35FL	TC-35FL-AC
Optional extra Universal fixing kit	UFK-T

Up to 30°C below ambient temperature

Up to +65°C in the heating mode

12/24/230 volts

TC special electronics

High-tech à la carte –

Your tailor-made box, step by step

Well-proven thermoelectrics plus special modules of your choice – it just takes a few easy steps to create your own customised box. Start by choosing the right-sized appliance from our standard programme (7, 14, 21 or 35 litres, p. 12 – 13), then combine it with the extra modules you need. The table below shows you which modules are available for which cooler.



**Thermoelectrics
+ extra modules
= custom-made
cooling**

Easy documentation – from the logger to the laptop or thermal printer



For the sake of continuous, tamper-proof temperature recording the data logger is firmly integrated in the cooler. Data can be transferred to a laptop computer via a data cable with infrared interface – or printed out directly using the attachable printer.

Extra modules available for thermoelectric coolers

Thermo-electric coolers	DTTC-01 Digital temperature readout	DTTC-02 One factory preset fixed temperature	DTTC-03 Variable temperature	DTTC-04 Interior fan	DTTC-05 Heater with three-point controller	DTTC-06 Digital radio thermometer	DTTC-07 Data logger with software and USB port	DTTC-08 Thermal printer	DTTC-09 Two factory preset fixed temperatures	DTTC-12 Data logger as single unit without software	DT-13 3-pin plug-in system
TC-07 approx. 7 litres up to 25°C below ambient temperature	●	●		●		●	●	●	●	●	●
TC-14FL approx. 14 litres up to 30°C below ambient temperature	●	●		●	●	●	●	●	●	●	●
TC-21FL approx. 21 litres up to 30°C below ambient temperature	●	●	●	●	●	●	●	●	●	●	●
TC-35FL approx. 35 litres up to 30°C below ambient temperature	●	●	●	●	●	●	●	●	●	●	●

Extra modules for thermoelectric coolers

4.10



DTTC-01
Digital readout of the current temperature inside the box. Replaces the soft-touch operating panel of the TC standard boxes.

Product	Ref. No.
Digital temperature readout DTTC-01	




DTTC-06
Digital radio thermometer transmits current temperature to the dashboard-mounted display unit (display unit included in the delivery kit).

Product	Ref. No.
Digital radio thermometer	DTTC-06



DTTC-07
Data logger with software and USB connection for continuous recording of the temperature.

Product	Ref. No.
Data logger with software and USB	DTTC-07

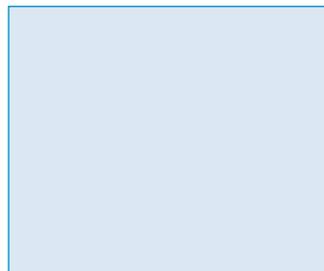

DTTC-02
One fixed temperature in a range from +10°C to +40°C preset in the factory. Tolerance: $\pm 2^\circ\text{C}$ (independent of outside temperature; closer upon request). Test log supplied as standard.

Product	Ref. No.
One factory preset fixed temperature	DTTC-02



DTTC-03
Temperature variable in a range from +10°C to +40°C with temperature controller. Control electronics reliably compensate for deviations from preset value. Tolerance: $\pm 2^\circ\text{C}$ (closer upon request).

Product	Ref. No.
Variable temperature	DTTC-03




DTTC-08
 Attachable **mini-printer** for real-time, on-site documentation.

Product	Ref. No.
Thermodrucker	DTTC-08




DTTC-04
High-performance fan for fast cooling or heating and uniform air circulation inside the box.

Product	Ref. No.
Interior fan	DTTC-04

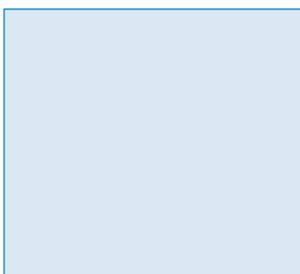

DTTC-09
Two preset fixed temperatures in a range from +10°C to +40°C. Easy change from one value to another with rocker switch. Tolerance: $\pm 2^\circ\text{C}$ (independent of outside temperature; closer upon request). Test log supplied as standard.

Product	Ref. No.
Two factory preset fixed temperatures	DTTC-09

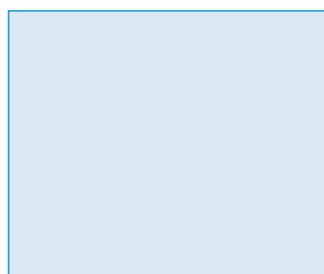

DTTC-05
Extra heater for fast heat-up (reduces wear on the Peltier element). Safer operation at extreme outside temperatures. With automatic three-point-controller (heat/OFF/cool).

Product	Ref. No.
Heater with three-point-controller	DTTC-05



DTTC-12
Data logger as single unit, without software.

Product	Ref. No.
Data logger as single unit without software	DTTC-12



DT-13
3-pin plug-in system for built-in power supply. Max. power input 25 A at 6 – 24 volts. Flat terminals (4 x 6.3 mm, 1 x 4.8 mm).

Product	Ref. No.
3-pin plug-in system	2225400001

Special requests welcome!

With the extra modules mentioned above the potential of our thermoelectric custom coolers is by no means exhausted. More features can be integrated upon request. Challenge our creativity – join us to design a customised solution to suit your needs!

CF special electronics
with soft start and turbo cooler



WAECO CoolFreeze CF-35
31 litres capacity



WAECO CoolFreeze CF-40
37 litres capacity



WAECO CoolFreeze CF-50
49 litres capacity



NEW! WAECO CoolFreeze CF-60
49 litres capacity

Cool power. Compressor technology

12/24 volts DC and 100 – 240 volts AC as standard!

Excellent cooling performance from -18°C to $+10^{\circ}\text{C}$, low energy consumption, ultra-quiet running – features you can depend on with each compressor appliance from Dometic WAECO.

The CoolFreeze standard programme (pages 18 – 25) gives you a choice of **nine different-sized models** – from a compact 10.5-litre box right through to a spacious 106-litre cooling container. All larger versions (from CF-35 upwards) are **fitted as standard with CF special electronics and are ready for connection to 12/24 volts DC and 100 – 240 volts AC.**

One cooler – two transport options:

The compact CoolFreeze CDF-18 with the practical carrying handle also comes in a wheeled version, CoolFreeze CDF-18T. The trolley is included in the delivery kit.

**Handle
or
trolley**

WAECO CoolFreeze CDF-18T
18 litres capacity



To suit temperature controlled transport needs Dometic WAECO standard boxes can be fitted with customised extra modules. Read more on this on pages 26 – 27.

Well-engineered technology for enhanced cooling efficiency

Perfect down to the last detail – product benefits of the CoolFreeze CF series



1 CF special electronics with digital temperature display, soft start and turbo cooler

Turbo power with economy. The CF special electronics system gives the compressor a soft and power-saving start at 2500 rpm. If the preset temperature is not reached within a short period of time or a temperature below -12°C has been set, the turbo cooler switches on automatically to boost the compressor speed. As soon as a preset temperature up to -12°C has been reached, the system switches back to economy mode (except if a temperature below -12°C has been set). **The outcome: fast yet economical cooling from $+10^{\circ}\text{C}$ to -18°C .**

- › Intelligent, automatic turbo cooler
- › 3-stage battery protection to be set on the digital display
- › 4-digit display readout
- › Digital display in Celsius or Fahrenheit
- › Free temperature setting on the display
- › Display of current interior temperature
- › Status and error indication by 2 separate LEDs
- › Memory function saves the last settings

Note:

For temperature controlled transport, CoolFreeze coolers can optionally be fitted with a highly sensitive electronic system. Complemented by further models of your choice (see pages 26 – 27) they convert into customised solutions quickly and cost-effectively.

2 High quality materials

Injection-moulded cabinets and housings; all materials CFC-free

3 Perfect workmanship

Optimal functionality, long service life

4 Cooling technology at its best

Danfoss BDF compressors; integrated voltage monitor

5 Universal power supply

12/24 volts DC and 100 – 240 volts AC; suitable for solar operation

6 Comfort and convenience


Ergonomically shaped recessed grips, sturdy carrying handles, well-organised interior

Extras available as standard

Interior light

Wide choice of accessories

Insulating protective covers, universal fixing kit (p. 25)

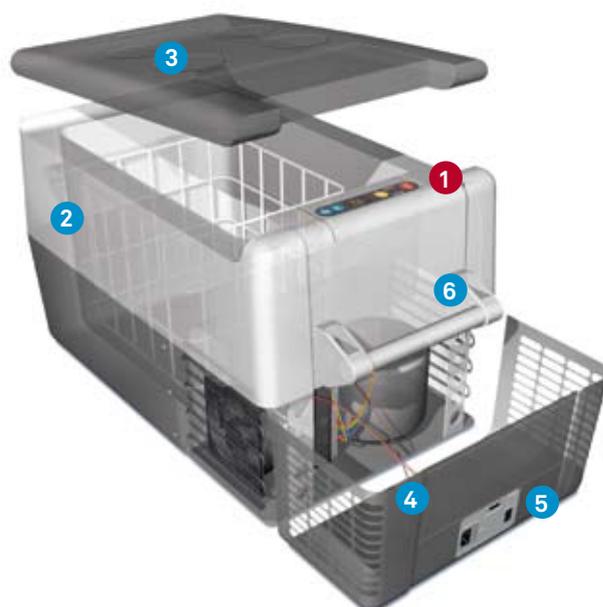

The new compact class

The new compact class

From now on WAECO compressor technology is also available in a **10.5-litre compact class**. The new **WAECO CoolFreeze CDF-11** comes in a size that previously seemed impossible. Compact, handy and space-saving like a thermoelectric unit. Only 8.8 kg in weight and comfortable to carry with the shoulder strap. Powerful cooling from +10°C to -18°C.

Custom configuration with extra modules (pages 26 – 27).



Super-compact

WAECO CoolFreeze CDF-11

Portable compressor cooler for refrigeration and deep-freezing

4.29



Gross capacity	approx. 10.5 litres
Voltage	12/24 volts DC
Power input	approx. 30 watts
Power consumption	0.36 kWh/24 h
Temperature range	+10°C to -18°C, continuously variable via electronic thermostat
Insulation	CFC-free polyurethane foam
System	Compressor with integrated control electronics, low voltage protection (can be disabled), electronic fuse/automatic reverse pole protection
Material	Housing and lid PP
Colour	Pale grey/dark grey
Weight	approx. 8.8 kg
Quality features	Electronic thermostat with digital temperature display, 3-stage battery monitor, LED interior light, adjustable shoulder strap, two drink holders, easy and secure fastening with the vehicle safety belt
Scope of delivery	DC connection cable
Test mark	CE, e-approved to 2006/28/EC (Automotive EMC Directive)

NEW



Temperature range
+10°C to -18°C


Suitable for solar operation

Extremely compact design

Two integrated drink holders

Securely fastened in a vehicle using the vehicle's own seat belts

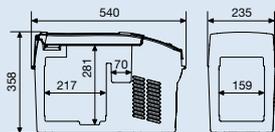

Product	Ref. No.
CoolFreeze CDF-11	9105100007
Optional extras Mains adapter 230 V > 24 V	EPS-100W



Two practical drink holders, convenient access with one hand



Well organised interior with two separate compartments



Display with digital temperature readout



Connection cable for 12/24 volts DC, battery monitor can be disabled

WAECO CoolFreeze CDF-18 / CDF-18T


Portable compressor cooler for refrigeration and deep-freezing



CDF-18



CDF-18T

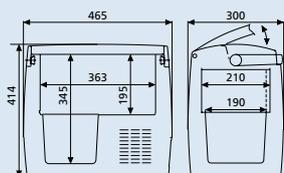

Gross capacity	approx. 18 litres
Voltage	12/24 volts DC
Power input	approx. 35 watts
Average running time	10% at +20°C ambient temperature 18% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to -18°C, continuously variable via electronic thermostat
Insulation	CFC-free PU foam
System	Compressor with integrated control electronics, low-voltage protection adjustable for leisure or starter battery by means of a slide switch, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 11.5 kg
Quality features	Detachable fold-up lid, sturdy carrying handle, vertical space for standing 2-litre bottles
Scope of delivery	DC connection cable
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
CoolFreeze CDF-18	9105100002
CoolFreeze CDF-18T (including trolley)	9105100006
Optional extras	
Mains adapter 230 V > 24 V	EPS-100W
Insulating protective cover	IC-CF-18



Temperature range
+10°C to -18°C



Suitable for
solar operation

Energy saver:
short running times
with reinforced
insulation:
consumes only 0.29
Ah/h to reach +5°C
interior temperature
at +20°C ambient
temperature

Insulating protective
cover as accessory
(page 25)

230-volt connection
with low-priced
mains adapters

WAECO CoolFreeze CDF-25

Compressor cooler for refrigeration and deep-freezing



Gross capacity	approx. 23 litres (19 l for refrigeration/deep-freezing, 4 l for fresh food)
Voltage	12/24 volts DC
Power input	approx. 35 watts
Average running time	15% at +20°C ambient temperature 19% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to -18°C, continuously variable via electronic thermostat
Insulation	CFC-free PU foam
System	Compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery by means of a slide switch, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 12.5 kg
Quality features	Detachable lid (lid mount at the front), vertical space for standing 2-litre bottles, interior light
Scope of delivery	DC connection cable, detachable wire basket
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
CoolFreeze CDF-25	9105100003
Optional extras	
Mains adapter 230 V > 24 V	EPS-100W
Universal fixing kit	UFG-C
Insulating protective cover	IC-CF-25



Temperature range
+10°C to -18°C




Suitable for
solar operation

Slim body –
minimal space
consumption

Insulating protective
cover and fixing kit as
accessories
(page 25)

230-volt connection
with low-priced
main adapter

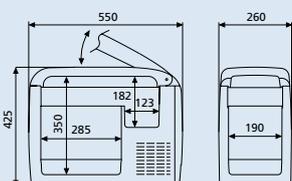

Truly independent

Integrated battery-run compressor cooler

WAECO **CoolFreeze CF-32UP** provides refrigeration and deep-freezing up to -18°C . And that's for **up to 18 hours without an external power supply**. Energy is supplied by the integrated battery which is simply enabled as and when required on a separate control panel. The LED display indicates the charging state. There are two options for battery recharging: 12- or 24-volt vehicle battery, or 230-volt mains (mains adapter comes as an accessory).



18 hours cooling without power supply


WAECO CoolFreeze CF-32UP

Compressor cooler/freezer with rechargeable battery

4.10



Gross capacity	approx. 31 litres
Voltage	12/24 volts DC
Power input	approx. 45 watts (cooling only) approx. 72 watts (cooling and charging)
Charging time	12 to 15 hours
Operation with battery	Up to 18 hours with fully charged battery at $+5^{\circ}\text{C}$ interior and $+32^{\circ}\text{C}$ ambient temperature
Average running time	18% at $+20^{\circ}\text{C}$ ambient temperature 22% at $+32^{\circ}\text{C}$ ambient temperature both at $+5^{\circ}\text{C}$ interior temperature
Power consumption	Power input x average running time
Temperature range	$+10^{\circ}\text{C}$ to -18°C , continuously variable via electronic thermostat with digital temperature display
Insulation	CFC-free PU foam
System	Fully hermetic Danfoss BD35F compressor with integrated control electronics, low-voltage protection, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP; lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 24 kg
Quality features	Intelligent battery monitor to prevent excessive discharging of the vehicle battery, display with digital temperature readout, temperature adjustable with two buttons in 1°C steps, simultaneous charging and cooling, battery charging state indicated by LED, battery low warning
Scope of delivery	DC connection cable, wire basket, detachable carrying handles
Test marks	CE, TÜV/GS, E-approved according to UN-ECE R10 directive

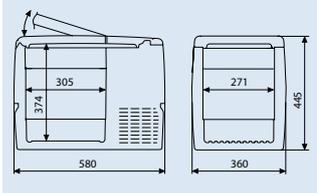

NEW



Temperature range
 $+10^{\circ}\text{C}$ to -18°C



Suitable for solar operation

With integrated battery for up to 18 hours operation without external power

Fixing kit as accessory (page 25)




An extra control panel for the battery: ON/OFF switch, LED display showing the battery charging state

Product	Ref. No.
CoolFreeze CF-32UP	9105100001
Optional extras	
Mains adapter 110 – 240 V \times 24 V	MPS-50
Universal fixing kit	UFG-C

WAECO CoolFreeze CF-35

Compressor cooler for refrigeration and deep-freezing with CF special electronics

4.10

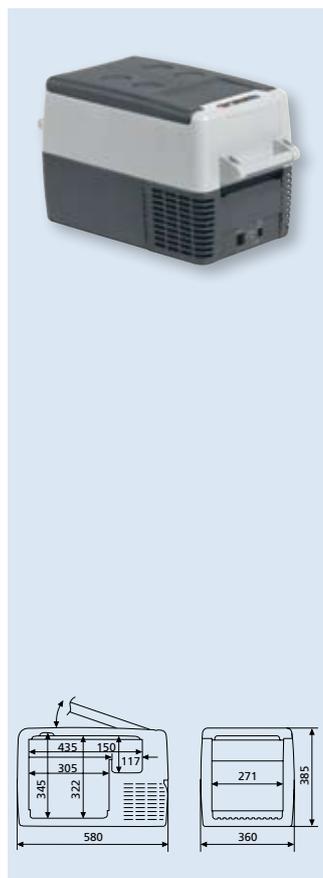

Gross capacity	approx. 31 litres (26,5 l for refrigeration/deep-freezing, 4.5 l for fresh food)
Voltage	12/24 volts DC and 100 – 240 volts AC
Power consumption	approx. 45 watts
Average running time	15% at +20°C ambient temperature 19% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	Fully hermetic Danfoss BD35F compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator
Material	Cabinet: PP, lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 15 kg
Quality features	Detachable lid (lid mount at the front), interior light, vertical space for standing 1.5-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, evaporator grille, detachable carrying handles
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
CoolFreeze CF-35	CF-035AC
Optional extras	
Universal fixing kit	UFK-C
Insulating protective cover	IC-CF-35



Temperature range
+10°C to –18°C



Suitable for
solar operation



12/24 volts DC and
100 – 240 volts AC

Protective cover,
and fixing kit
as accessories
(page 25)

WAECO CoolFreeze CF-40

Compressor cooler for refrigeration and deep-freezing with CF special electronics



Gross capacity	approx. 37 litres (31 l for refrigeration/deep-freezing, 6 l for fresh food)
Voltage	12/24 volts DC and 100–240 volts AC
Power input	approx. 45 watts
Average running time	18% at +20°C ambient temperature 22% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	As for CF-35
Material	Cabinet: PP, lid: PE
Colour	Body: pale grey/dark grey, lid: dark grey
Weight	approx. 16 kg
Quality features	Detachable lid (lid mount at the front), interior light, vertical space for standing 2-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)


Product	Ref. No.
CoolFreeze CF-40	CF-040AC
Optional extras	
Universal fixing kit	UFK-C
Insulating protective cover	IC-CF-40

CF special electronics
with soft start and
turbo cooler



WAECO CoolFreeze CF-50

Compressor cooler for refrigeration and deep-freezing with CF special electronics

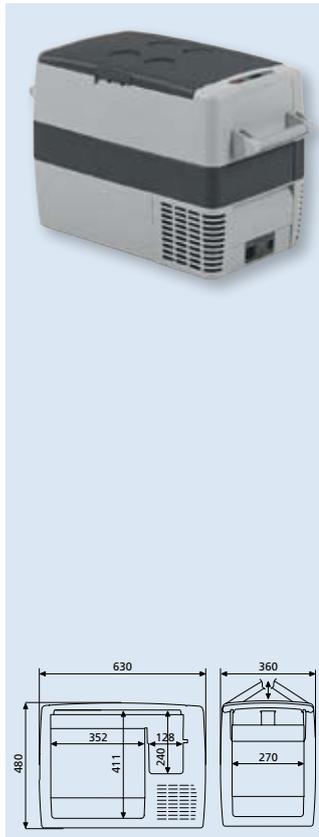

Gross capacity	approx. 49 litres (41 l for refrigeration/deep-freezing, 8 l for fresh food)
Voltage	12/24 volts DC and 110 – 240 volts AC
Power input	approx. 45 watts
Average running time	15% at +20°C ambient temperature 19% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	As for CF-35
Material	Cabinet: PP, lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 18 kg
Quality features	Detachable lid (plug-in lid mount, variable left/right), interior light, vertical space for standing 2-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	As for CF-40
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
CoolFreeze CF-50	CF-050AC
Optional extras	
Universal fixing kit	UFK-C
Insulating protective cover	IC-CF-50

WAECO CoolFreeze CF-60

Compressor cooler for refrigeration and deep-freezing with CF special electronics



Gross capacity	approx. 59 litres (51 litres for refrigeration/deep-freezing, 8 litres for fresh food)
Voltage	12/24 volts DC and 110 – 240 volts AC
Power input	approx. 45 watts
Average running time	18% at +20°C ambient temperature, 22% at +32°C ambient temperature, both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	As for CF-35
Material	Cabinet: PP, lid: PE
Colour	Body: pale grey/dark grey; lid: dark grey
Weight	approx. 21.6 kg
Quality features	Detachable lid (plug-in lid mount, variable left/right), interior light, vertical space for standing 2-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

Product	Ref. No.
CoolFreeze CF-60	CF-060AC
Optional extras	
Universal fixing kit	UFK-C
Insulating protective cover	IC-CF-60



Temperature range
+10°C to –18°C



Suitable for
solar operation



12/24 volts DC and
100 – 240 volts AC

Protective cover
and fixing kit as
accessories
(page 25)

CF-50/CF-60:
Detachable lid,
folds up transversely,
variable lid mounts



CF special electronics
with soft start and
turbo cooler




WAECO CoolFreeze CF-80

Large-capacity cooler for refrigeration and deep-freezing with CF special electronics



Gross capacity	approx. 80 litres (73 l for refrigeration/deep-freezing, 7 l for fresh food)
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input	approx. 65 watts
Average running time	12% at +20°C ambient temperature 22% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	Fully hermetic Danfoss BD50F compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery via electronic system, electronic fuse/automatic reverse pole protection, dynamically ventilated fin condenser, aluminium rollbond evaporator
Material	Cabinet: coated sheet steel, top and base: PP, lid: PE
Colour	Body: pale grey/dark grey, lid: pale grey
Weight	approx. 31 kg
Quality features	Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

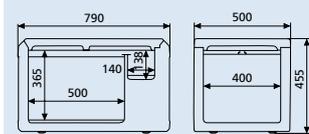

Product	Ref. No.
CoolFreeze CF-80	CF-080AC
Optional extras	
Insulating protective cover	IC-CF-80



Temperature range
+10°C to –18°C



Suitable for solar operation



12/24 volts DC and 100 – 240 volts AC

Jumbo coolers for personal and professional use


Protective cover as accessory (page 25)

WAECO CoolFreeze CF-110

Large-capacity cooler for refrigeration and deep-freezing with CF special electronics



Gross capacity	approx. 106 litres (93 l for refrigeration/deep-freezing, 13 l for fresh food)
Voltage	12/24 volts DC and 100 – 240 volts AC
Power input	approx. 65 watts
Average running time	14% at +20°C ambient temperature 25% at +32°C ambient temperature both at +5°C interior temperature
Power consumption	Power input x average running time
Temperature range	+10°C to –18°C, free temperature setting via electronic thermostat with digital temperature readout
Insulation	CFC-free PU foam
System	As for CF-80
Material	Cabinet: coated sheet steel, top and base: PP, lid: PE
Colour	Body: pale grey/dark grey, lid: pale grey
Weight	approx. 33 kg
Quality features	Detachable lid (screw-on lid mount, variable left/right), sturdy latches and hinges, interior light, vertical space for 2-litre bottles. CF special electronics with soft start and turbo cooler
Scope of delivery	DC and AC connection cables, removable wire basket, detachable carrying handles
Test marks	CE, TÜV/GS, e-approved to 2006/28/EC (Automotive EMC Directive)

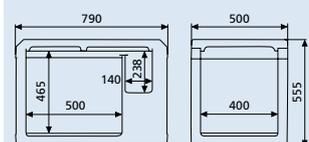

Product	Ref. No.
CoolFreeze CF-110	CF-110AC
Optional extras	
Insulating protective cover	IC-CF-110

CF special electronics with soft start and turbo cooler



Deep-freezing up to – 24°C

For safety's sake

For the storage and transport of ice-cream, a deep-freeze temperature of **at least –21 °C** is stipulated by law – which means a standard compressor cooler just won't do. To be on the safe side, opt for the new WAECO CoolFreeze FC-30TK. It performs **up to –24°C** and gives you a full 30-litre deep-freeze capacity for your temperature sensitive freight.

Useful accessories: wire basket to organise the interior, fixing kit for a secure hold during the drive, high-quality insulating protective cover.



WAECO CoolFreeze FC-30TK

Compressor deep-freezer

4.12




Gross capacity	approx. 30 litres
Voltage	12/24 volts DC
Power input	approx. 60 watts
Average running time	40% at +20°C ambient temperature, 60% at +32°C ambient temperature, both at –18°C interior temperature
Power consumption	Power input x average running time
Temperature range	–10°C to –24°C
Insulation	30 mm polyurethane foam
System	Fully hermetic Danfoss BD35F compressor with integrated control electronics, low voltage protection adjustable for leisure and starter battery by means of a slide switch, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, aluminium rollbond evaporator, continuously variable thermostat
Material	Body: sheet steel; base, lid and upper part of the cabinet: embossed plastic (polystyrene)
Colour	Body: pale grey, powder-coated; lid and upper part of the cabinet: grey/white
Weight	16.0 kg
Scope of delivery	DC connection cable
Test marks	CE



Temperature range
–10°C to –24°C

Continuously
variable

Wire basket, protective
cover and fixing kits as
optional extras

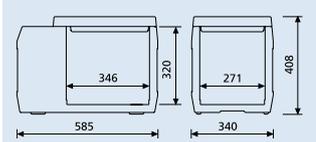

Product	Ref. No.
CoolFreeze FC-30TK	9105100005
Optional extras	
Wire basket for FC-30TK	W529.3
Protective cover for FC-30TK	IC-FF30
Universal fixing kit	W1440.ST
Mains adapter 110 – 240 V > 24 V	MPS-50

Accessories for CoolFreeze coolers

Designed for safe and convenient handling

Tailor-made protective covers with insulating effect and a universal fastening device that keeps the cooler firmly in place while driving – **WAECO CoolFreeze accessories give you more functionality, safety and user comfort.**

Insulating protective covers

4.10

For CoolFreeze CDF-18, CDF-25, CF-35, CF-40, CF-50, CF-60, CF-80, CF-110



Material, outside	High-quality silver-grey Oxford nylon, lid and base in robust, rubber coated, black nylon
Material, inside	Aluminium coated polyester
Colour, sides	Silver grey
Colour, lid and base	Black
Quality features	Detachable lid and base, outside pockets to store small items, four fixing rings to secure the box safely in the vehicle

Extra protection and insulation for your cooler


Product	Weight (kg)	Ref. No.
Protective cover for CoolFreeze CDF-18	approx. 1.0	IC-CF-18
Protective cover for CoolFreeze CDF-25	approx. 1.1	IC-CF-25
Protective cover for CoolFreeze CF-35	approx. 1.3	IC-CF-35
Protective cover for CoolFreeze CF-40	approx. 1.5	IC-CF-40
Protective cover for CoolFreeze CF-50	approx. 2.0	IC-CF-50
Protective cover for CoolFreeze CF-60	approx. 2.0	IC-CF-60
Protective cover for CoolFreeze CF-80	approx. 2.2	IC-CF-80
Protective cover for CoolFreeze CF-110	approx. 2.4	IC-CF-110

Universal fixing kit

4.10


For CoolFreeze CDF-25, CF-35, CF-40, CF-50, CF-60

For fastening of WAECO CoolFreeze coolers in vehicles

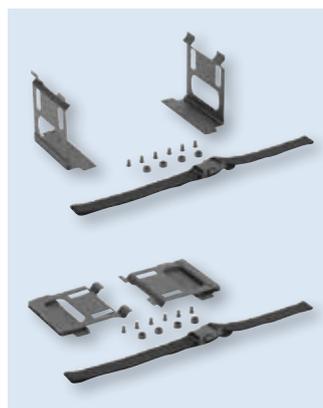

Material/Colour	Powder coated metal
Colour	Black
Scope of delivery	Two frame sections, adjustable strap with snap lock, set of screws

For a firm and secure hold in the vehicle




Product	Ref. No.
Universal fixing kit	UFK-C

Made to measure from modules

Well-proven compressor technology plus special modules of your choice – it takes just a few easy steps to create your own customised box. Start by choosing the right-sized appliance from our standard programme (10.5 to 106 litres, p. 18 – 23), then combine it with the extra modules you need.

Remote monitoring by GSM – documentation with data logger

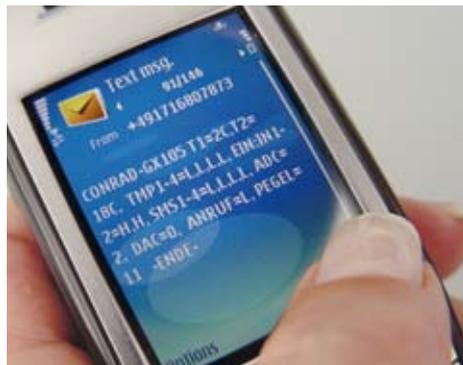

Eutectic cooling and/or GSM

Eutectic cooling is ideal for long-term, temperature controlled transport of high-quality products without external power supply (e.g. by air or rail). Prior to transportation, the box is pre-cooled on the mains to achieve the factory preset fixed temperature. Cooling then works without power supply. The temperature is reliably maintained up to 35 hours (at ambient temperatures up to +30°C.) Ideal add-on: the GSM module, which can be used to send a text containing the current inside and outside temperature information to the retrieving mobile phone number or e-mail address.

Note: Retrofitting the eutectic module reduces the net capacity and increases the weight of CoolFreeze standard boxes.

Documentation

For the sake of continuous, tamper-proof temperature recording the data logger is firmly integrated in the cooler. Data can be transferred to a laptop computer via a data cable with infrared interface – or printed out directly using the attachable printer.

Extra modules available for compressor coolers

Compressor-coolers	DT-01	DT-02	DT-03	DT-04	DT-05	DT-06	DT-07	DT-08	DT-09	DT-10	DT-11	DT-12	DT-13
Temperature range +10°C to -18°C	Digital temperature readout	One factory preset fixed temperature	Variable temperature	Interior fan	Heater with three-point controller	Digital radio thermometer	Data logger with software and USB	Thermal printer	Two factory preset fixed temperatures	Eutectic cooling	GSM module	Data logger as single unit without software	3-pin plug-in system
CDF-11 approx. 10.5 litres	●	●		●		●	●	●	●			●	●
CDF-18 approx. 18 litres	●	●	●	●	●	●	●	●	●			●	●
CDF-25 approx. 23 litres	●	●			●	●	●	●	●			●	●
CF-32UP approx. 31 litres	●	●	●		●	●	●	●	●			●	●
CF-35 approx. 31 litres	●	●	●		●	●	●	●	●			●	●
CF-40 approx. 37 litres	●	●	●		●	●	●	●	●			●	●
CF-50 approx. 49 litres	●	●	●		●	●	●	●	●	●	●	●	●
CF-60 approx. 59 litres	●	●	●		●	●	●	●	●	●	●	●	●
CF-80 approx. 80 litres	●	●	●	●	●	●	●	●	●	●	●	●	●
CF-110 approx. 106 litres	●	●	●	●	●	●	●	●	●	●	●	●	●

Extra modules for compressor coolers

4.10



DT-01

Digital readout of the current temperature inside the box. Replaces the soft-touch operating panel of the CF standard boxes.

Product	Ref. No.
Digital temperature readout	DT-01



DT-08

Attachable **mini-printer** for real-time, on-site documentation

Product	Ref. No.
Thermal printer	DT-08

DT-02

One fixed temperature in a range from -18°C to $+10^{\circ}\text{C}$ preset in the factory. Tolerance: $\pm 2^{\circ}\text{C}$ (independent of outside temperature; closer upon request). Test log supplied as standard.

Product	Ref. No.
One factory preset fixed temperature	DT-02

DT-09

Two preset fixed temperatures in a range from -18°C to $+10^{\circ}\text{C}$. Easy change from one value to another with rocker switch. Tolerance: $\pm 2^{\circ}\text{C}$ (independent of outside temperature; closer upon request). Test log supplied as standard.

Product	Ref. No.
Two factory preset fixed temperatures	DT-09



DT-03

Temperature variable in a range from -18°C to $+10^{\circ}\text{C}$ with temperature controller. Control electronics reliably compensate for deviations from preset value. Tolerance: $\pm 2^{\circ}\text{C}$ (closer upon request).

Product	Ref. No.
Variable temperature	DT-03



DT-10

Eutectic cooling for CoolFreeze CF-50, CF-80, CF-110. Cooler is pre-cooled on the mains to the factory preset temperature level, which is maintained for up to 35 hours without energy supply (at ambient temperatures up to $+30^{\circ}\text{C}$).

Product	Ref. No.
Eutectic cooling	DT-10



DT-04

High-performance fan for fast cooling or heating and uniform air circulation inside the box.

Product	Ref. No.
Interior fan	DT-04



DT-11

GSM module for remote monitoring

Product	Ref. No.
GSM module	DT-11

DT-05

Extra heater for safer operation at low outside temperatures. Also for compressor coolers to be equipped with additional heating function.

Product	Ref. No.
Heater with three-point-controller	DT-05



DT-12

Data logger as single unit, without software.

Product	Ref. No.
Data logger as single unit without software	DT-12



DT-06

Digital radio thermometer transmits current temperature to the dashboard-mounted display unit (display unit included in the delivery kit).

Product	Ref. No.
Digital radio thermometer	DT-06



DT-13

3-pin plug-in system for built-in power supply. Max. current consumption: 25 A at 6 – 24 volts. Flat terminals (4 x 6.3 mm, 1 x 4.8 mm).

Product	Ref. No.
3-pin plug-in system	2225400001



DT-07

Data logger with software and USB connection for continuous recording of the temperature.

Product	Ref. No.
Data logger with software and USB	DT-07

More features upon request.

WAECO CoolMatic MH-07
7 litres capacity



WAECO CoolMatic MR-07
7 litres capacity



+4°C compressor cooling or +40°C heating
According to DIN 75079



Mobile, hygienic, perfect in every detail

Stainless-steel built-in cabinets with compressor cooling or heating

Cooling or heating with $\pm 2^\circ\text{C}$ accuracy: WAECO's innovative generation of refrigerator and warmer cabinets was specifically designed **for use in emergency vehicles.**

The interior temperature is limited at +4°C or, respectively, +40°C (tolerance: $\pm 2^\circ\text{C}$). This, combined with well thought-out details, qualifies the cabinets for other applications, too.



Built-in functionality: digital temperature read-out in the stainless steel installation frame



Transport-proof: catches that keep the door tightly closed even in inclined positions



Ideal in confined spaces: detachable cooling unit with 1.5-metre supply cable (MR-07)



Adjustable interior: The height of the grid shelf can be varied in three steps.



No mixing up of items: well illuminated interior




Inner values: water drainage, additional fan for optimal temperature distribution

WAECO CoolMatic MR-07

Compressor built-in refrigerator with stainless steel front. Fixed point temperature preset at +4°C (tolerance ± 2°C)

4.09

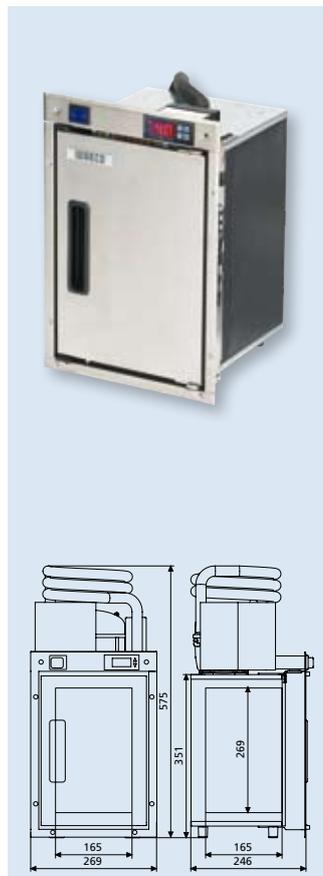


Gross capacity	approx. 7 litres
Voltage	12 volts DC
Average power consumption	approx. 36 watts
Temperature range	Fixed point temperature preset at +4°C (± 2°C)
Insulation	Polyurethane/CFC-free
System	Fully hermetic Danfoss BD35F compressor with integrated control electronics, low-voltage protection, electronic fuse/automatic reverse pole protection, dynamically ventilated wire tube condenser, three-face rear wall evaporator foamed from behind
Material	Door and flush-mount installation frame: stainless steel; Interior: plastic
Colour	Front: silver; interior: white
Weight	approx. 10 kg
Quality features	Fixed point temperature at +4°C (± 2°C), optimal temperature distribution with additional fan integrated in the inside rear wall, digital temperature display integrated in the stainless steel installation frame, interior light, grid shelf height adjustable in three positions, recessed door grip, variable door mounts and locks (left/right), ON/OFF switch. Where space is limited, the cooling unit can be fitted to the side of the cabinet (right or left), or up to 1.5 metres away.
Test marks	CE, e-approved to 2006/96/EC (Automotive EMC Directive)



Certified according to DIN 75079

Cooling unit can be fitted separately



Product	Ref. No.
CoolMatic MR-07	MR-07-12

WAECO CoolMatic MH-07

Built-in warmer cabinet with stainless steel front. Fixed point temperature preset at +40°C (tolerance ± 2°C)

4.09



Gross capacity	approx. 7 litres
Voltage	12 volts DC
Average power consumption	approx. 15 to 20 watts
Temperature range	Fixed point temperature preset at +40°C (± 2°C)
Insulation	Polyurethane/CFC-free
System	12-volt heating resistor
Material	Door and flush-mount installation frame: stainless steel; Interior: plastic
Colour	Front: silver; interior: white
Weight	approx. 4.5 kg
Quality features	Fixed point temperature at +40°C (± 2°C), optimal temperature distribution with additional fan integrated in the inside rear wall, digital temperature display integrated in the stainless steel installation frame, interior light, grid shelf height adjustable in three positions, recessed door grip, variable door mounts and locks (left/right), ON/OFF switch.
Test marks	CE, e-approved to 2006/96/EC (Automotive EMC Directive)



Certified according to DIN 75079

Product	Ref. No.
CoolMatic MH-07	MH-07-12

Compressor built-in cooler

High performance, compact size



About 5 litres storage for temperature-sensitive freight is provided by the WAECO CoolFreeze MC-045. High-performance compressor technology and the factory preset fixed temperature of +5°C qualify this cooler for temperature controlled transport. With its compact outside dimensions it can be fitted almost anywhere in the vehicle. The detachable cooling unit can be installed up to 0.5 metres away from the cooler.



WAECO CoolFreeze MC-045

Compressor built-in cooler

4.09

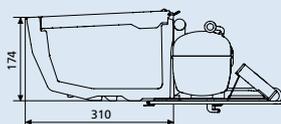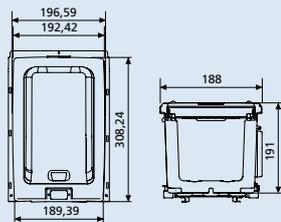

Gross capacity	approx. 4.5 litres
Voltage	12 volts DC
Average power consumption	45 watts, depending on the ambient temperature
Temperature range	Fixed point temperature preset at +5°C
Insulation	Polyurethane/CFC-free
System	Fully hermetic Danfoss BD35F compressor with integrated control electronics, low-voltage protection, electronic fuse/automatic reverse pole protection, aluminium heat exchanger with dynamic air circulation
Material	Outside: Styrofoam; inside: PVC
Dimensions (W x D)	192.42 x 308.24 mm (cut-out for installation)
Weight	approx. 1.5 kg
Quality features	Fixed temperature factory preset at +5 °C, ON/OFF switch, LED status indication Where space is limited the cooling unit can be fitted up to 0.5 metres away from the cooler.
Test marks	e-approved to 2006/28/EC (Automotive EMC Directive)




**+5°C
fixed point
temperature**



12 volts

**Certified according to
DIN 75079**

**Cooling unit can be
fitted apart**



Product	Ref. No.
CoolFreeze MC-045	9105100004



Warm and cold food on the move

Ideal for transport over longer distances: the Dometic GB-24 PLUS keeps cold or warm food at the right temperature for at least twelve hours. The thermoelectric refrigerator and warmer cabinet was specifically designed for use with Gastronorm containers. It can optionally be fitted with feet or wheels. If required, two cabinets can be stacked on top of each other. Energy comes from a mains supply or the 12-volt vehicle battery, depending on the place of use.

Dometic GB-24 PLUS

4.25

Thermoelectric refrigerator and warmer cabinet for food transport over longer distances



Gross capacity	92 litres
Voltage	12 volts DC, 110 – 230 volts AC
Average power consumption	66 watts at 12 volts DC, 100 watts at 110 – 230 volts AC
Temperature range	+2°C to +5°C for refrigerated food +75°C to +80°C for warm food
Insulation	Polyurethane/CFC-free
System	Active, isothermal system with wear-free thermoelectric (Peltier element)
Material	HDPE (high-density polyethylene)
Colour	Grey
Dimensions (W x H x D)	510 x 705 x 785 mm (without wheels) 510 x 835 x 785 mm (with wheels)
Weight	26 kg
Quality features	Keeps food warm or cold for at least 12 hours, simple switch-over between refrigerator and warmer function, digital readout of the interior temperature, 2 cabinets can be stacked on top of each other, optional fitting with wheels or feet, detachable seal, door opening up to 270°, DIN A5 document holder
Test marks	CE, E1

Product	Ref. No.
Dometic GB-24 PLUS	991.6910.41
Optional extras	
Set of 2 rotating wheels, with brake & 2 fixed castors	296.1804.01
Adjustable stainless steel feet (4 pieces)	296.1804.00

NEW



12/110 – 230 volts

Keeps food warm or cold for at least 12 hours

Compatible with Gastronorm containers

7 tray levels (each spaced 57 mm apart)



Mobile professionals for a continuous cold chain

Four transport containers for maintaining a continuous cold chain in professional kitchens – designed by Dometic Luxembourg, specialist in cooling solutions for catering and medical applications. All four units feature a high-performance compressor system and electronic regulation of the interior temperature. A battery-powered acoustic alarm system signals any deviation from the preset temperature.

Dometic R-120

Mobile compressor refrigerator fitted for catering use

4.25



Gross capacity	134 litres
Voltage	12/24 volts DC, 110 – 230 volts AC
Average power consumption	85 watts
Temperature range	Interior temperature can be set between +2°C and +10°C
Insulation	Polyurethane/CFC-free
System	Danfoss BD-50 compressor, electronic temperature regulation, air circulation in the interior
Material	HDPE (high-density polyethylene)
Colour	Grey
Outside dimensions (W x H x D)	565 x 710 x 950 mm
Inside dimensions (W x H x D)	430 x 500 x 605 mm
Weight	42 kg
Quality features	Electronic regulation of the interior temperature, battery-powered acoustic alarm for deviation from preset temperature, compatible with 400 x 600 mm Euronorm containers, various configurations possible, optional fitting with wheels or feet, stackable, detachable seal, DIN A5 document holder
Test marks	CE

Product	Ref. No.
Dometic R-120	958.4004.41
Optional extras	
GB-35 rack system for 400 x 600 mm GN containers/baking trays	296.3618.15*
Rack system for grill tray or drawers	296.3618.19*
Stainless steel grill tray and supports	296.3618.14
U-sections for Rack-01 rack system	296.3567.28*
* 2 pieces required in each case	

NEW



At ambient temperatures of 16°C to 43°C:

Temperature range +2°C to +10°C



12/24/110 – 230 volts

Specially designed to maintain the cold chain in professional kitchen use

Compatible with 400 x 600 mm Euronorm containers

Various configurations

Dometic RF-400

Mobile compressor refrigerator fitted for catering use



Gross capacity	370 litres
Voltage	230 volts AC
Average power consumption	180 watts (300 watts during the defrosting phase)
Temperature range	Interior temperature can be set between +10°C and -20°C
Insulation	Polyurethane/CFC-free
System	Compressor, electronic temperature regulation, air circulation in the interior
Material	HDPE (high-density polyethylene)
Colour	Grey
Outside dimensions (W x H x D)	790 x 1624 x 965 mm
Inside dimensions (W x H x D)	590 x 874 x 715 mm
Weight	136 kg
Quality features	Electronic regulation of the interior temperature, battery-powered acoustic alarm for deviation from preset temperature, automatic defrosting, rack system with 3 stainless steel grill trays to organise the interior, compatible with GN2/1 and GN1/1 Gastronorm containers, wheels with brakes, integrated grips for easy handling, detachable double seal, door opening up to 270° with latching, lockable door, easy replacement of the complete cooling unit
Test marks	CE

Dometic RF-650

Mobile compressor refrigerator fitted for catering use



Gross capacity	612 litres
Average power consumption	180 watts (300 watts during the defrosting phase)
Outside dimensions (W x H x D)	880 x 1900 x 1090 mm
Inside dimensions (W x H x D)	660 x 1130 x 820 mm
Weight	165 kg
Quality features	Electronic regulation of the interior temperature, battery-powered acoustic alarm for deviation from preset temperature, automatic defrosting, rack system with 3 stainless steel grill trays to organise the interior, compatible with 400 x 600 mm Euronorm containers and 600 x 800 mm baking trays, wheels with brakes, integrated grips for easy handling, detachable double seal, door opening up to 270° with latching, easy replacement of the complete cooling unit
Test marks	CE
Other specifications as for RF-400	

Dometic RF-1000

Mobile compressor refrigerator fitted for catering use



Gross capacity	920 litres
Average power consumption	180 watts (300 watts during the defrosting phase)
Outside dimensions (W x H x D)	1030 x 1900 x 1275 mm
Inside dimensions (W x H x D)	810 x 1130 x 1005 mm
Weight	191 kg
Quality features	Electronic regulation of the interior temperature, battery-powered acoustic alarm for deviation from preset temperature, automatic defrosting, rack system with 3 stainless steel grill trays to organise the interior, wheels with brakes, integrated grips for easy handling, detachable double seal, door opening up to 270° with latching, easy replacement of the complete cooling unit
Test marks	CE
Other specifications as for RF-400	

Product	Ref. No.
Dometic RF-400	958.4006.41
Dometic RF-650	958.4008.41
Dometic RF-1000	958.4010.41
Optional extras	
Extra grill tray for RF-400 (532 x 675 mm)	296.3618.12
Guide plate left/right for RF-400 (one each for one extra grill tray)	296.3567.09/296.3567.10
Extra grill tray for RF-650 (600 x 790 mm)	296.361.811
Guide plate left/right for RF-650 (one each for one extra grill tray)	296.3567.22/296.3567.23
Extra grill tray for RF-1000 (758 x 976 mm)	296.3618.06
Guide plate left/right for RF-1000 (one each for one extra grill tray)	296.3567.24/296.3567.25

NEW



At ambient temperatures of 16°C to 43°C:
Temperature range +10°C to -20°C



230 volts AC

Specially designed to maintain the cold chain in professional kitchen use

Dual fridge/freezer function

Automatic defrosting

Compatible with Gastronorm containers GN2/1 and GN1/1 (RF-400)

Compatible with 400 x 600 mm Euronorm containers and 600 x 800 mm baking trays (RF-650)

The low-cost alternative to van conversion

With the compressor cooling container **WAECO CoolFreeze 850VAN** you can have a fully equipped refrigerated vehicle without cost-intensive van conversions. The spacious **850-litre container** is simply lashed to the cargo floor with straps and hooks. Energy for cooling comes from the **12-volt vehicle battery** or a **230-volt mains supply**. When external power supply is unavailable (e.g. in catering use), the preset temperature is maintained for several hours by the **integrated rechargeable 12-volt gel battery**. Another benefit of the retrofit solution: clean removal is possible at all times.

WAECO CoolFreeze 850VAN

Compressor cooling container for vans

4.25



Gross capacity	850 litres
Voltage	12 volts DC, 220 – 240 volts AC
Average power consumption	150 watts max. at 12 volts DC 220 watts max. at 220 – 240 volts AC (360 watts during battery charging)
Temperature range	0°C to +12°C
Insulation	Polyurethane, CFC-free
System	DC compressor with mains adapter and battery charger for integrated gel battery
Material	HDPE (high-density polyethylene) / polyurethane
Colour	Grey
Dimensions (W x H x D)	1100 x 1000 x 1400 mm
Weight	160 kg
Quality features	Independent operation for up to 8 hours with battery integrated as standard, or up to 16 hours with second battery available as optional extra, excellent temperature distribution with air circulation system, low energy consumption through optimised insulation, digital temperature readout with accurate set point adjustment, separate control and display sensor, visual temperature alarm, dual magnetic seal, high-performance multi-LED interior light, lashing eyes on the sides of the unit, fast and secure fastening with lashing strap set supplied as standard, transport-proof closing system (can also be opened from inside), simultaneous cargo cooling and battery charging
Test marks	CE, TÜV/GS, E1, ATP, HACCP compliant, 74/408/EEC, crash tested according to ECE R80

Scope of delivery Set of cables, 1 large stainless steel grill tray, integrated gel battery, lashing strap set

Product	Ref. No.
CoolFreeze 850VAN	958.4020.20
Optional extras	
Stainless steel grill tray, large	991.1808.40
Stainless steel grill tray, small, top	991.1808.45
Extra battery set	991.1808.35
Universal 12-volt connection set	911.1808.50

NEW



At ambient temperatures of 16°C to 43°C:
Temperature range 0°C to +12°C



12/230 volts

Integrated gel battery


Up to 16 hours independent cooling with additional battery

LED interior light

NEW




Dimensions

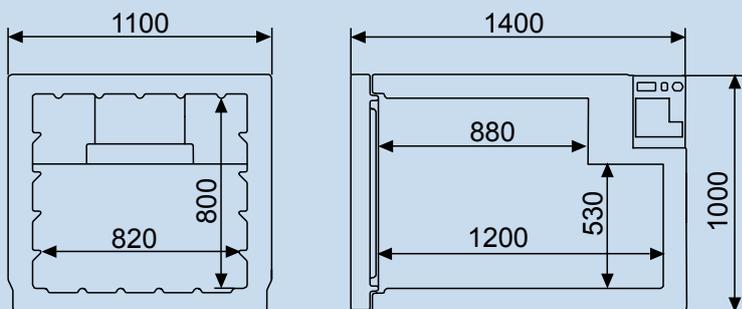

Fits the following types of vans with rear right-hand-side door; other vehicles on request.

Vehicle	Top width	Bottom width	Height	Depth
FORD Transit connect	1190	1220	1090	1460
FIAT Doblo	1160	1200	1180	1420
RENAULT Kangoo	1140	1220	1100	1450
CITROËN Berlingo	1120	1220	1100	1500
PEUGEOT Partner / Tepee	1400	1230	1070	1600

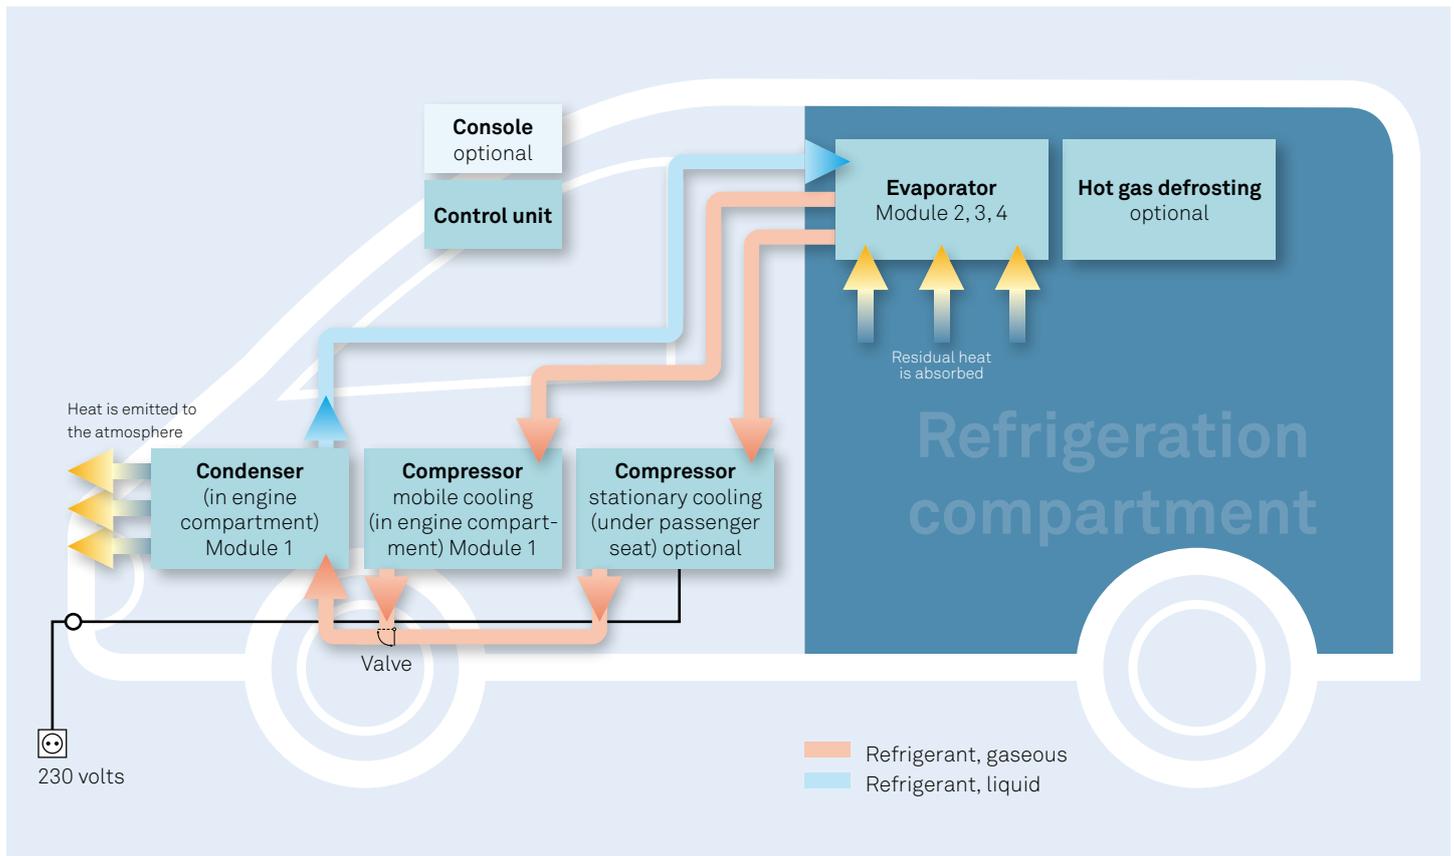

Customised precision cooling

For temperature-sensitive freight

Fully integrated refrigeration, customised to suit the freight and the vehicle: using the modular DiaviaFrigo system we quickly and efficiently create tailor-made solutions for demanding logistic tasks. What ever it is you are transporting – perishable or frozen foodstuffs, medicines or blood donations – DiaviaFrigo gives you one-degree accuracy. And without the typical “backpack” on the roof, because the entire refrigeration system is integrated in the vehicle where it takes up little space.

It takes just a few easy steps to create a customised precision cooling system. You start by specifying the type of vehicle, the size of the cargo compartment and the required temperature conditions. We then put together the modules to suit your specifications: the compressor mounting kit and condenser mounting kit for your specific vehicle, and the evaporator to match the size of your cargo compartment (up to 18 m³), including the control system. If required we add optional features such as a stationary cooling system or a vehicle-specific console for the control unit.

Certified cooling solution for mobile operation

Forwarders of food products and other temperature-sensitive freight are familiar with the strict legal requirements. They are responsible for maintaining a continuous cold chain right through to the consumer. No problem, DiaviaFrigo cooling kits by Dometic WAECO are a hundred percent reliable. The systems are ATP-approved and certified according to DIN 8958 (Testing of cooling equipment for insulated means of transportation). This gives you the peace of mind of knowing you are transporting your freight correctly and impeccably.



Evaporator module

Fully integrated cooling

DiaviaFrigo cooling kits by Dometic WAECO give you the unique benefit of fully integrated installation. The compact evaporator unit is mounted inside the cargo compartment, under the roof. So it's never in the way, neither during loading and unloading, nor during clean-up. And, unlike with other systems, there are no roof-mounted parts. The benefits are:

- | No problems going where there are headroom restrictions (e.g. in underground car parks)
- | More safety if the vehicle has to swerve (its centre of gravity remains unchanged)
- | No need for a roof cut-out: the vehicle body rigidity is fully retained; no enhanced risk of corrosion
- | No affect on the vehicle's appearance and aerodynamics



Neatly integrated: control element with vehicle-specific console (optional). The current cargo department temperature is always in view for the driver.

Optional: stationary cooling system

The optional stationary cooling system optimises your logistic chain. The vehicle can be loaded (or remain loaded) on the eve of delivery and is ready to set off in the morning. There's no need for any stationary intermediate storage.

The second compressor required for stationary cooling is installed in the driver's cabin under the seats where it takes up little space and is virtually invisible. Mains hook-up is via a splash-proof 230-volt socket integrated in the front bumper. As the components of the refrigeration system are operated by the vehicle's own electrical system even during stationary operation, a high-quality IU0U charger has been fitted to maintain an optimum battery charge.



Optional: hot gas defrosting system

Long standstill times because the evaporator is iced up and has to be defrosted? – Not any more, if your refrigerated vehicle is equipped with the optional hot gas defrosting system.

Here's how it works: The refrigerant circulating between the compressor and the evaporator is heated up and quickly defrosts the evaporator. This means the vehicle is soon ready for service again and the evaporator can operate at full capacity.

Important note: A hot gas defrosting system is a necessary investment if you have a deep-freeze vehicle.



Fax order form

Simply copy the form – fill it in – and fax it back to us.

Sender details/stamp

Fancy more ...? More products. More catalogues.



„On the Move“

The Dometic WAECO specialist catalogue for camping and caravanning. A comprehensive range of products – refrigeration, air conditioning, electronics, reversing video systems, vehicle accessories, lights, windows, kitchen and sanitation equipment.



„On the Road again!“

The tried and tested Dometic WAECO range of accessories for trucks and vans. Air conditioning, refrigeration and kitchen equipment, reversing video systems, comfort solutions and electronics.



“More Driving Pleasure”

Safety and comfort accessories for cars. From parking aids to cruise controls and battery care products. Plus a wide choice of car coolers.



„Biomedical Refrigeration“

A comprehensive range for safe storage and transport of temperature-sensitive products

You can order our catalogues on the internet at www.dometic-waeco.com

What else can we do for you?

The friendly Dometic WAECO team are always glad to help.

You are interested in Dometic and WAECO products, but still have some questions you'd like to ask? Or perhaps you need advice on a product you've just bought? Get in touch! Fun and convenience for mobile people is our philosophy. Buying a Dometic or WAECO product is just the start. Our aim is to delight you with a whole range of mobile technology in future, too.

You'd like to find out more? Just order the comprehensive catalogues.

Your contact to Dometic WAECO:

www.dometic-waeco.com

info@dometic-waeco.com

Always a good link: the Dometic WAECO website. That's where you will find the complete Dometic and WAECO range. You'll get a clear view of the products along with detailed information. Plus interesting news about our company and the latest special offers. And of course you can order all our catalogues online.



Dometic GROUP is a customer-driven, world-leading provider of leisure products for the RV, automotive, truck and marine markets. We supply the industry and aftermarket with a complete range of air conditioners, refrigerators, awnings, cookers, sanitation systems, lighting, mobile power equipment, comfort and safety solutions, windows, doors and other equipment that make life more comfortable away from home.

Dometic GROUP supplies a wide range of workshop equipment for service and maintenance of built-in air conditioners.

Dometic GROUP also provides specially designed refrigerators for hotel rooms, offices, wine storage and transport and storage of medical products.

Our products are sold in almost 100 countries and are produced mainly in wholly-owned production facilities around the world.



Dometic GROUP

(D) Dometic WAECO International GmbH

Hollefeldstraße 63
D-48282 Emsdetten
Tel +49 2572 8790
Fax +49 2572 879300
Mail info@dometic-waeco.de
Net www.dometic-waeco.com

(A) Dometic Austria GmbH

Neudorferstrasse 108
A-2353 Guntramsdorf
Tel +43 2236 908070
Fax +43 2236 90807060
Mail info@waeco.at

(CH) Dometic Switzerland AG

Riedackerstrasse 7a
CH-8153 Rümlang
Tel +41 44 8187171
Fax +41 44 8187191
Mail info@dometic-waeco.ch

(DK) Dometic Denmark A/S

Nordensvej 15, Taulov
DK-7000 Fredericia
Tel +45 75585966
Fax +45 75586307
Mail info@waeco.dk

(E) Dometic Spain S.L.

Avda. Sierra del Guadarrama, 16
E-28691 Villanueva de la Cañada
Madrid
Tel +34 902 111 042
Fax +34 900 100 245
Mail info@dometic.es

(F) Dometic S.N.C.

ZA du Pré de la Dame Jeanne B.P. 5
F-60128 Plailly
Tel +33 3 44633500
Fax +33 3 44633518
Mail info@dometic.fr

(FIN) Dometic Finland OY

Mestarintie 4
FIN-01730 Vantaa
Tel +358 20 7413220
Fax +358 9 7593700
Mail info@dometic.fi

(I) Dometic Italy S.p.A.

Via Virgilio, 3
I-47122 Forlì (FC)
Tel +39 0543 754901
Fax +39 0543 754983
Mail vendite@dometicwta.com

(N) Dometic Norway AS

Skolmar 24
N-3232 Sandefjord
Tel +47 33428450
Fax +47 33428459
Mail firmapost@waeco.no

(NL) Dometic Benelux B.V.

Ecustraet 3
NL-4879 NP Etten-Leur
Tel +31 76 5029000
Fax +31 76 5029090
Mail info@dometic.nl

(S) Dometic Scandinavia AB

Gustaf Melins gata 7
S-421 31 Västra Frölunda
Tel +46 31 7341100
Fax +46 31 7341101
Mail info@waeco.se

(UK) Dometic UK Ltd.

Dometic House, The Brewery,
Blandford St. Mary
Dorset DT11 9LS
Tel +44 844 626 0133
Fax +44 844 626 0143
Mail sales@dometic.co.uk

(AUS) WAECO Pacific Pty. Ltd.

1 John Duncan Court
Varsity Lakes QLD 4227
Tel +61 7 55076000
Fax +61 7 55076001
Mail sales@waeco.com.au

(HK) WAECO Impex Ltd.

Suites 2207-11 · 22/F · Tower 1
The Gateway · 25 Canton Road
Tsim Sha Tsui · Kowloon
Hong Kong
Tel +852 2 4632750
Fax +852 2 4639067
Mail info@waeco.com.hk

(ROC) WAECO Impex Ltd.

Taipei Office
2 Fl-3 · No. 56 Tunhua South Road, Sec 2
Taipei 106, Taiwan
Tel +886 2 27014090
Fax +886 2 27060119
Mail marketing@waeco.com.tw

(UAE) Dometic AB

Regional Office Middle East

P.O. Box 74775
Dubai, United Arab Emirates
Tel +971 4 3212160
Fax +971 4 3212170
Mail info@dometic.ae

(ZA) Dometic (Pty) Ltd.

Regional Office South Africa & Sub-Saharan Africa

P.O. Box 2562
2008 Bedfordview, South Africa
Tel +27 11 450 4978
Fax +27 11 450 4976
info@dometic.co.za

Your dealer: