

LUP63

Pin clamp with vanishing hook and locating pin



L	U	P	6	3	S	U	3	1	0	0	0
1	2	3	4	5	6	7	8				

1 Serie	2 Version	3 Size
----------------	------------------	---------------

LT = Pin clamp with vanishing hook and locating pin

P = Pneumatic standard

63 = \varnothing 63 mm

4 Modell	5 Sensing style	6 Pin diameter
-----------------	------------------------	-----------------------

S = Vanishing hook and pin

N = No sensor
(with protection plate)

U = Electronic 24 Vcc sensor with M12 swivel connector

1 = 16 mm

2 = 20 mm

3 = 25 mm

4 = 30 mm

5 = 35 mm

6 = 40 mm


7 Locating pin	8 Progressive numbering
-----------------------	--------------------------------

1 = Pin included

0 = Progressive numbers for special products are assigned by the Sales Dept.



Pneumatic pin clamp with vanishing hook and pin

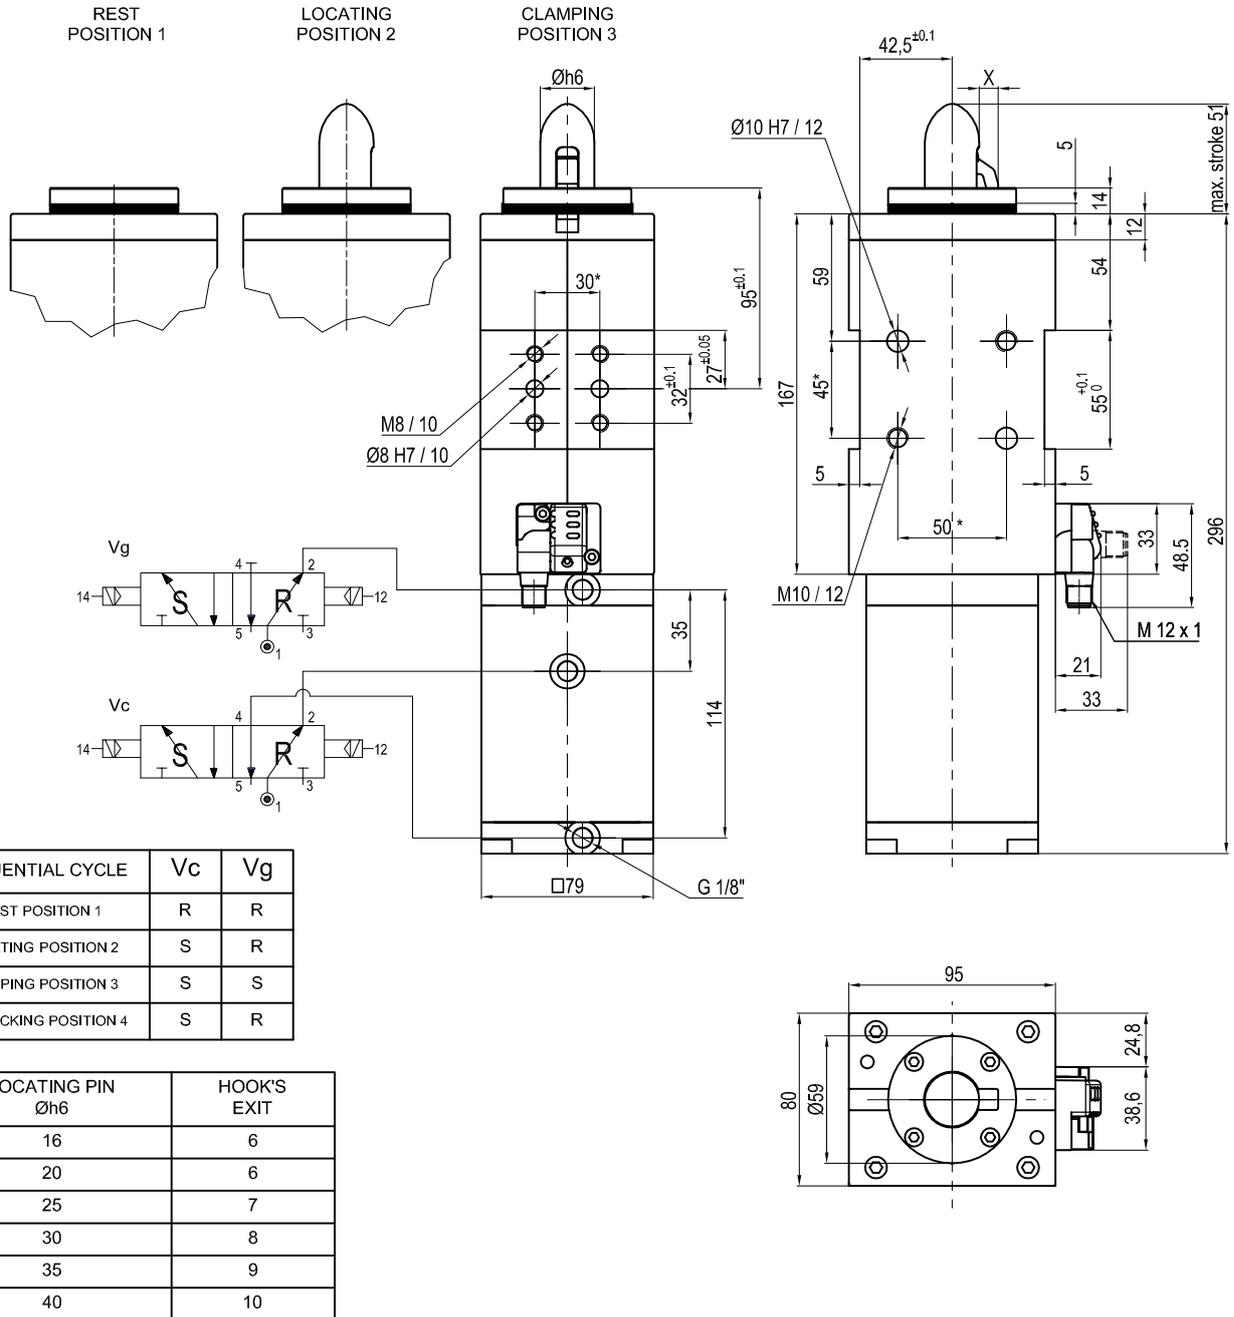

Bore \varnothing	Clamping force	Weight
63 mm	150 daN	3 Kg

Min./max. operating pressure: **0,4 / 0,8 MPa**
 Operating temperature: **5° ± 45° C**
 Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°
 Protection Class: **IP 54**

* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modifications without notice